


# SUPRAFORM

THERMOFORMING FILMS

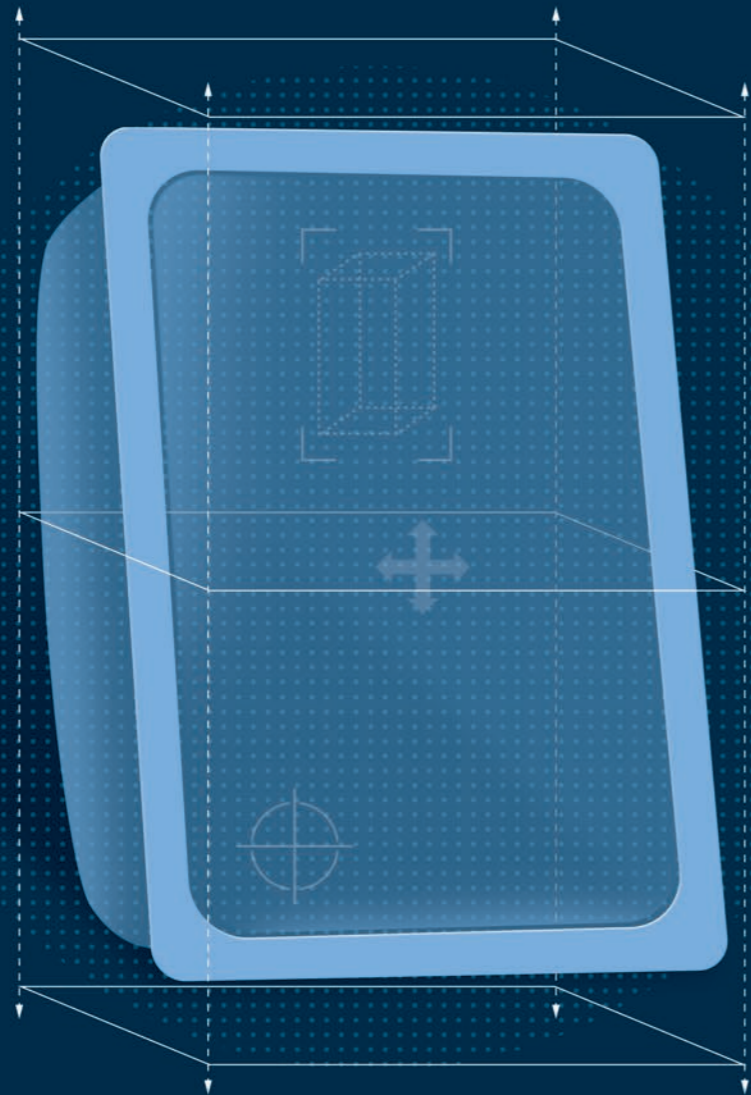

## APPLICATION

- + Meat and sausage products (meat, sausages, smoked products)
- + Hard and curd cheeses
- + Fish and seafood
- + Bakery products (bread, buns)
- + Medical and technical products

## ADVANTAGES

- + Very good thermoforming properties
- + Very good sealability
- + Oxygen and water vapour barrier
- + Very good barrier to gases (EVOH)
- + High transparency and gloss
- + Efficient packing
- + Very good processing parameters

## Trustworthy packaging

### MULTILAYER FILMS

SYMBOL	RFI	XFF	XFD	XFG	XFH	XFL	XFS
COMPOSITION	PE, EVOH	PA, PE	PA, PE	PA, PE	PA, EVOH, PE	PA, PE	PA, PP
THICKNESS RANGE (µm)	120-300	60-300	100-300	100-240	60-300	120-220	70-200
SIZE RANGE (mm)	150-2150	150-3200	150-3200	150-2200	150-3200	150-3200	150-2200
OTHERS	PE seal, film for thermoforming	PE seal	PE seal, with increased puncture resistance	PE seal	PE seal, high barrier	PE seal, easy peel	PP seal, film for sterilisation (121 °C)

PRODUCTS MARKED WITH A GREEN LEAF ARE THE RESULT OF IMPLEMENTING THE 5-POINT ECOSTRATEGY WHICH STRIVES TO REACH CIRCULAR ECONOMY.

### SKIN FILM

SYMBOL	COMPOSITION	THICKNESS RANGE (µm)	SIZE RANGE (mm)	OTHERS
GLS	EVOH, PE	80; 100; 130; 150	150-1500	PE seal, high barrier, for PET/PE trays and laminated paper

### AVAILABILITY OF COLOURS



We design solutions according to individual customer needs